



Installation Instructions

Model:	Polaris General
Description:	Radio Install
Part Number:	MBQG-RAD-1
Assembly Time:	45 Min

Before you begin, read through these instructions and check that all parts are present. Always disconnect negative battery terminal prior to installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	GMR-LED with Housing (MBQG-RAD-1)	1


Tools Required	
1	Bojo Tool
2	7mm wrench
3	T25 Torx Driver

Dash Disassembly

- Remove hood by turning two latches



- Remove seven push clips from front of dash

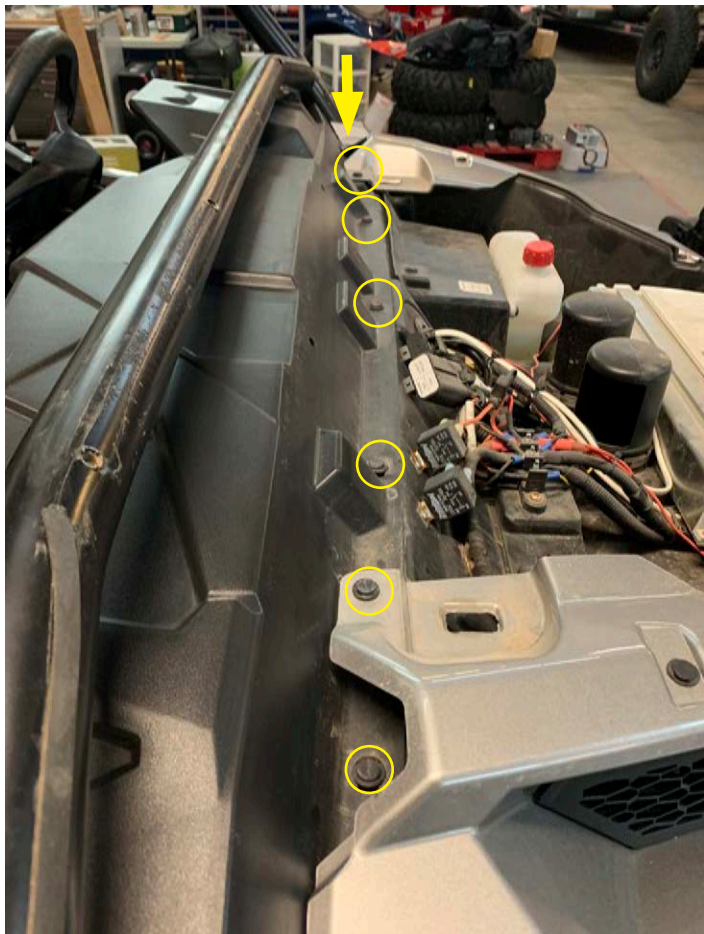


Dash Disassembly

- Remove top two push pins from driver and passenger door opening



- Lift front of dash at eight locations with Bojo tool

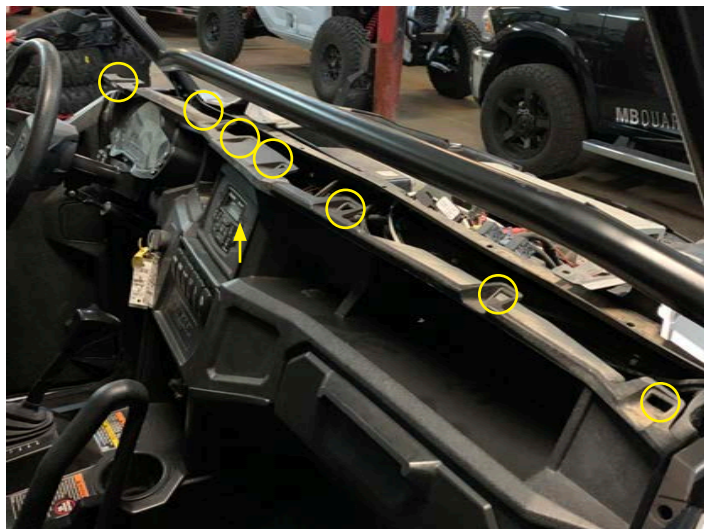


Dash Disassembly

- Remove upper pocket assembly




Radio Install

- Install two double threaded bolts in back of radio with 7mm wrench

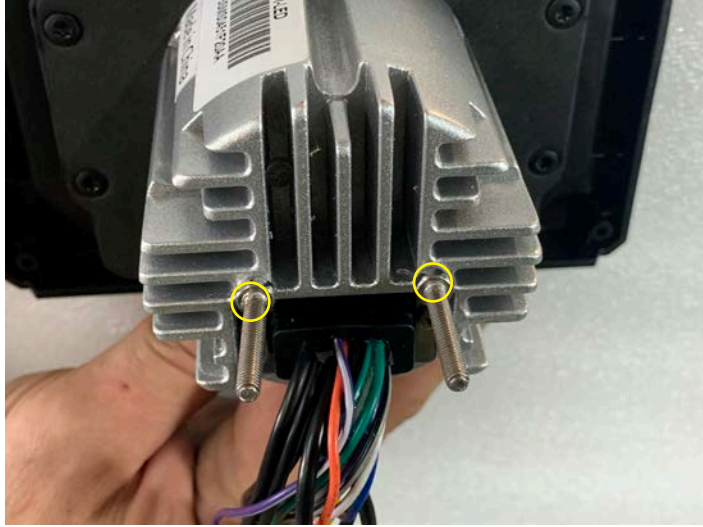


- Place radio and dash kit from the front side of the dash

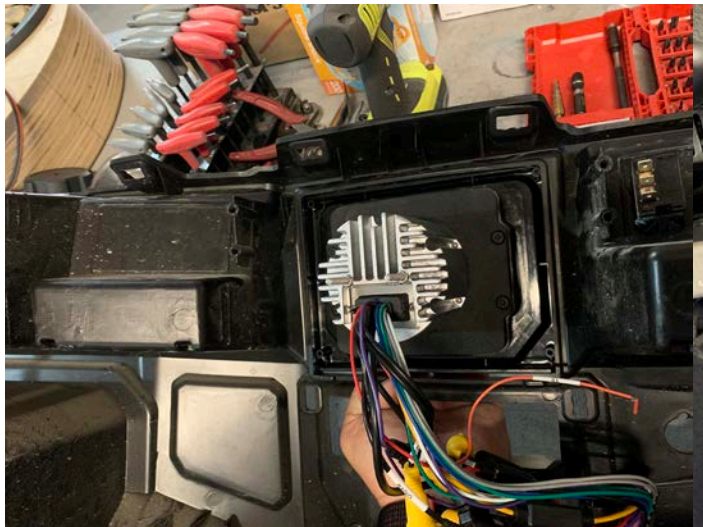

- Position rear bracket and loosely install the two nuts on back of radio

Loosely install four High-Low threadforming screws with a T25 Torx

Position radio in opening moving left and right and up, and down, once happy, tighten the nuts on the back of the radio with a 7mm wrench and T25 Torx on the bracket

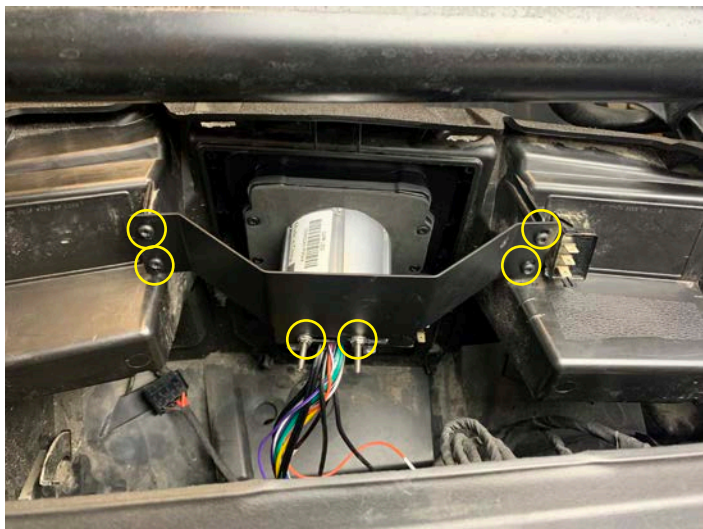


Reassembly

- Install top of dash, snapping eight push clips on front of dash



- Install six push pins on front of dash

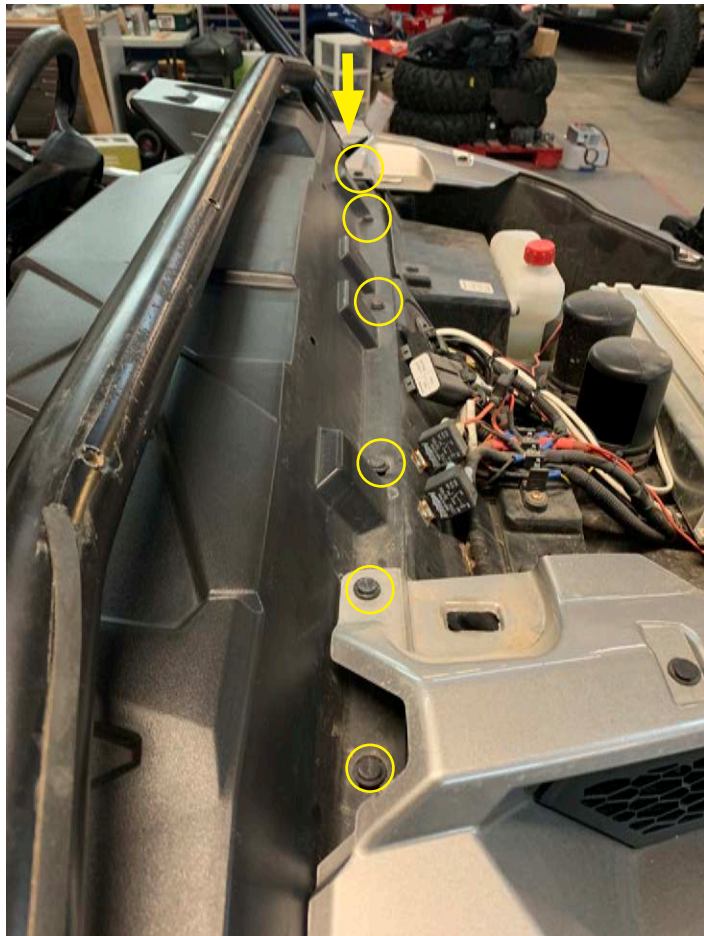

Reassembly

- Install hood





FCC Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

WARRANTY

Maxxsonics USA Inc. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics USA Inc. will, at its discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics USA Inc. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation and freight are not the responsibility of Maxxsonics USA Inc. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use such marks by MB Quart is under license.

All product names, logos, and brands are property of their respective owners. All company, product and service names used in this literature are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

©2021 Maxxsonics USA, Inc.

MBQuart products are designed and engineered in the USA by



MBQG-RAD-1 REV 01